

Wulftec SMLPA200 Automatic Pallet Wrapping Machine

The Wulftec SMLPA200 Automatic Stretch Wrapping Machine is the industry's most robust standalone wrapping machine. Built big, strong and tough the SMLPA200 allows the forklift operator to place the pallet, and start the cycle remotely so other tasks can be performed. The operator never needs to leave the forklift, meaning the SMLPA is the most productive wrapping machine on the market.

A great utility for the harshest conditions.

Backed up by FROMM Packaging Australia, rent or purchase options, the SMLPA200 delivers for the Australian industry. All equipment is supported by our on-site mobile service team and spare parts are readily available.



★ Features

- Patented cut/clamp/wipe system
- 100% all steel construction
- Easy access to all components
- AC variable frequency drives and motors
- Local parts availability - most are non-proprietary
- Allen Bradley PLC and AC motors
- NO-THREAD® powered pre-stretch carriage


+ Benefits

- Automatic pallet height detection sensor
- Cut and wipe to secure film
- Soft start and stop for light loads
- Fully adjustable wrap programs
- Automatic operation by remote control
- Capable of wrapping up to 160 pallets per day
- 250% film stretch - 1 metre film = 3.5 metres
- FROMM 2 year warranty

Machine Stretch Film

FROMM premium films can reduce the cost to wrap a pallet whilst maintaining the all important containment forces needed to maintain the security of your goods whilst stored and transported. Ask your FROMM expert for their guidance.



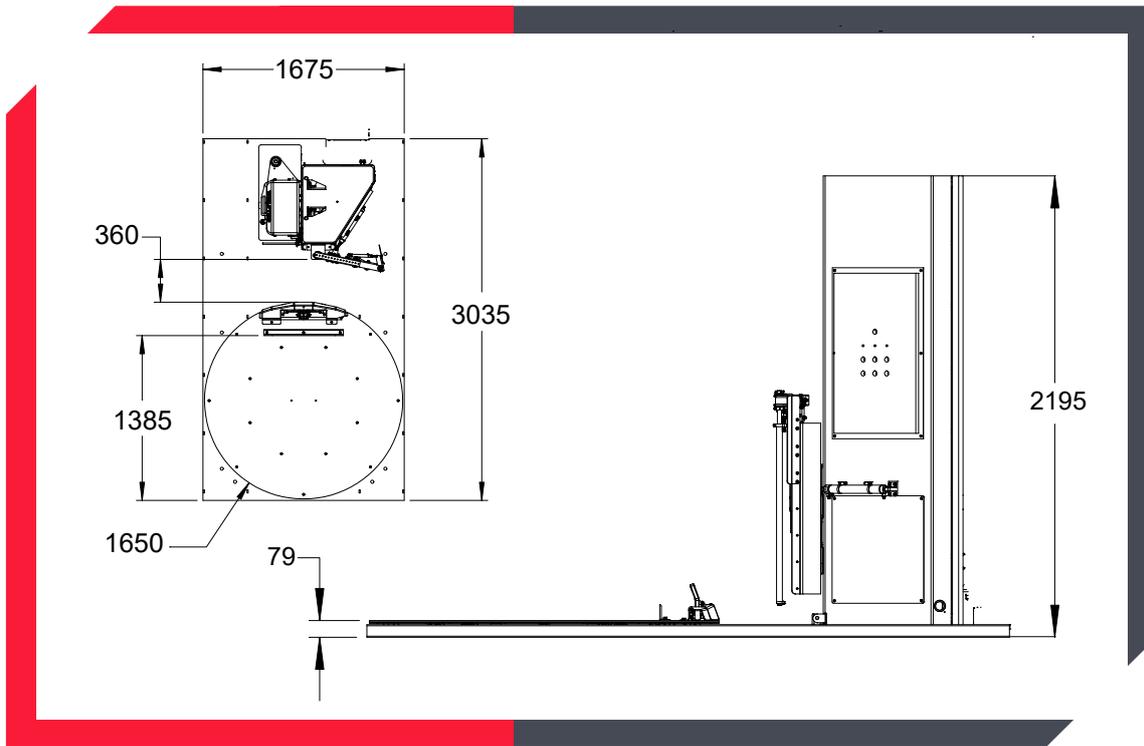

★ Technical Specifications

Capacity:

Max. Pallets per Day: 160

Pallet Size:

Width (mm): 1050
 Length (mm): 1050
 Max. Height (mm): 2032
 Max. Weight (kg): 2275

Turntable:

Speed (RPM): 16
 Diameter, round (mm): 1650
 Height (mm): 79

Film Tension:

Max. Pre-stretch (%): 250

Film Specification:

Width (mm): 500

Power Supply:

240V, Single Phase, 50 Hz
 Air Supply Needed:

3 CFM @ 80 PSI

Weight:

Total weight approx. (kg): 980

Operating Conditions:

Temperature range (°C): 0 - +40

Machine Options:

Extended mast up to 3200mm
 Extended base
 Wash down motors for wet or corrosive environment
 Steel it Paint - rust protection coatings available
 High speed - 24RPM
 90 degree exit
 Electronic scales
 High profile turntable
 Pneumatic roping