

## Wulftec SMLPA200 Automatic Pallet Wrapping Machine

The Wulftec SMLPA200 Automatic Stretch Wrapping Machine is the industry's most robust standalone wrapping machine. Built big, strong and tough the SMLPA200 allows the forklift operator to place the pallet, and start the cycle remotely so other tasks can be performed. The operator never needs to leave the forklift, meaning the SMLPA is the most productive wrapping machine on the market.

A great utility for the harshest conditions.

Backed up by FROMM Packaging Australia, rent or purchase options, the SMLPA200 delivers for the Australian industry. All equipment is supported by our on-site mobile service team and spare parts are readily available.

### Machine Stretch Film

FROMM premium films can reduce the cost to wrap a pallet whilst maintaining the all important containment forces needed to maintain the security of your goods whilst stored and transported. Ask your FROMM expert for their guidance.




### ★ Features

- Patented cut/clamp/wipe system
- 100% all steel construction
- Easy access to all components
- AC variable frequency drives and motors
- Local parts availability - most are non-proprietary
- Allen Bradley PLC and AC motors
- NO-THREAD® powered pre-stretch carriage

### + Benefits

- Automatic pallet height detection sensor
- Cut and wipe to secure film
- Soft start and stop for light loads
- Fully adjustable wrap programs
- Automatic operation by remote control
- Capable of wrapping up to 160 pallets per day
- 250% film stretch - 1 metre film = 3.5 metres
- FROMM 2 year warranty

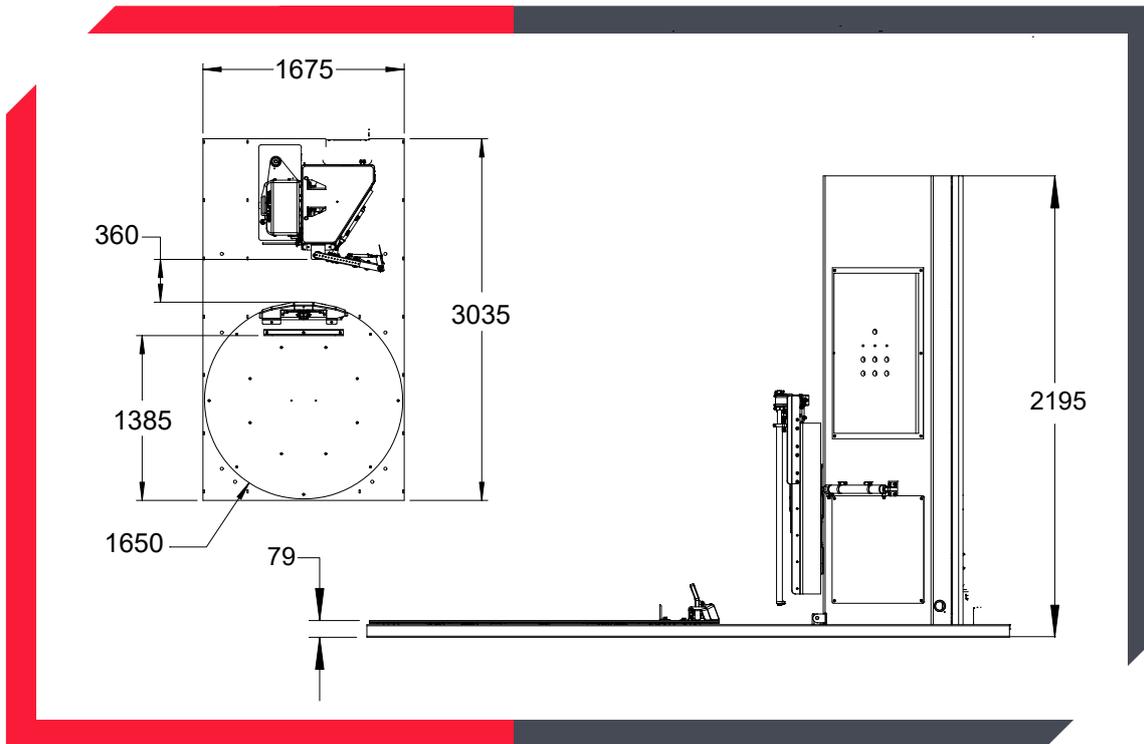

## ★ Technical Specifications

### Capacity:

Max. Pallets per Day: 160

### Pallet Size:

Width (mm): 1050  
 Length (mm): 1050  
 Max. Height (mm): 2032  
 Max. Weight (kg): 2275

### Turntable:

Speed (RPM): 16  
 Diameter, round (mm): 1650  
 Height (mm): 79

### Film Tension:

Max. Pre-stretch (%): 250

### Film Specification:

Width (mm): 500

### Power Supply:

240V, Single Phase, 50 Hz  
 Air Supply Needed:

3 CFM @ 80 PSI

### Weight:

Total weight approx. (kg): 980

### Operating Conditions:

Temperature range (°C): 0 - +40

### Machine Options:

Extended mast up to 3200mm  
 Extended base  
 Wash down motors for wet or corrosive environment  
 Steel it Paint - rust protection coatings available  
 High speed - 24RPM  
 90 degree exit  
 Electronic scales  
 High profile turntable  
 Pneumatic roping

**FROMM** | PACKAGING  
 AUSTRALIA

Australia Wide

T 1800 023 890

E info@fromm-pack.com.au

W www.fromm-pack.com.au